






T2 Topway Plus FM Pre-Assembled Heating Manifold



Product Features

The Topway Plus Type 2 manifold is a pre-assembled stainless-steel manifold for use with underfloor and wall hung radiator systems available with between 2 and 12 ways. Complete with flowmeters, a 6-bar pressure gauge and Tecno-Varia automatic air vent as standard. The 1" pre-assembled Topway manifold is suitable for use with a combined mixing valve and circulating pump set such as the TM3-R Mixing Unit.

Features and Benefits

-  Flow and return manifold bars pre-assembled onto brackets which helps to further reduce installation time.
-  Manifold bars housed in anti-vibration mountings to increase lifespan and reduce any sound levels associated with the UFH system.
-  Pipe connections using Emmeti patented Monoblocco fittings supports a wide range of pipes including Copper, MLCP, PB and PE-X.
-  Integrated two stage flow meters for ease of filling, balancing and commissioning of the system.
-  Integrated automatic air vent, fill and drain off points as well as pressure gauge as standard helps to reduce filling and commissioning times.




T2 Topway Plus FM Pre-Assembled Heating Manifold

Specification

Max. temperature on primary circuit	90°C
Maximum operating pressure	6 bar
Temperature gauge range	0° - 80°C
Manifold size	1"
Primary connections	G1"
Manifold connections	M 24x19

Dimensions

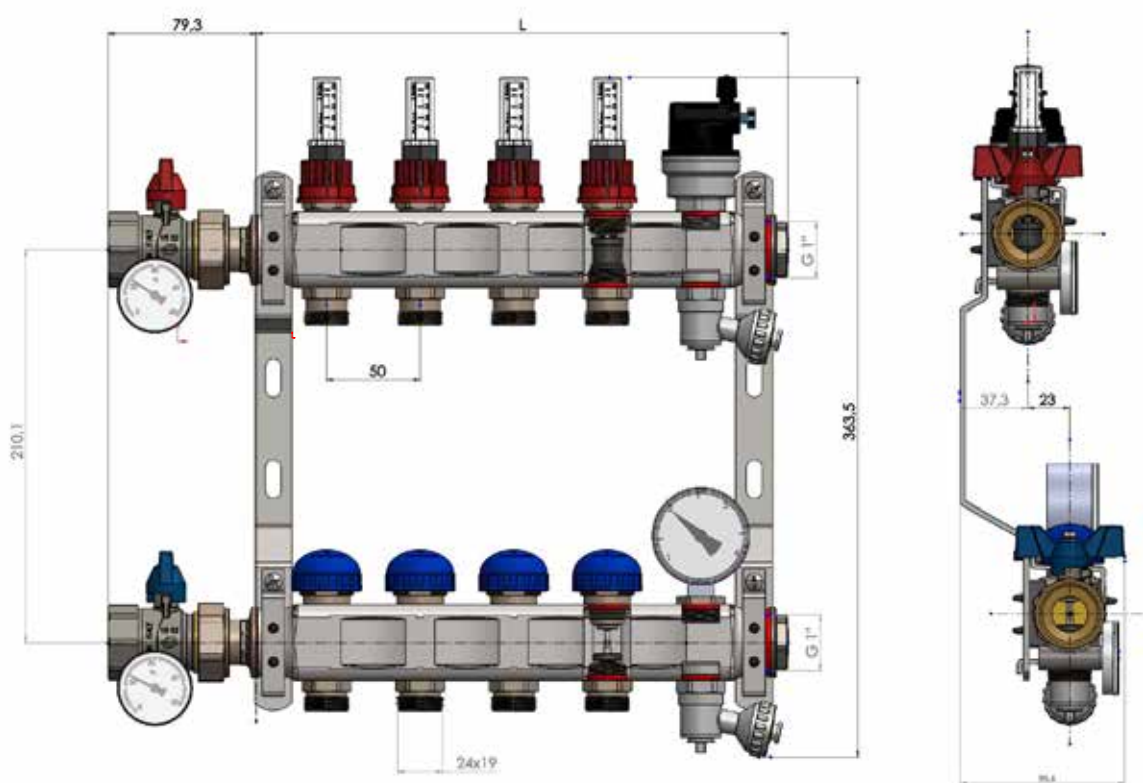


Type	2 ways	3 ways	4 ways	5 ways	6 ways	7 ways	8 ways	9 ways	10 ways	11 ways	12 ways
L mm	185	235	285	335	385	435	485	535	585	635	685

T2 Topway Plus FM Pre-Assembled Heating Manifold

Type 2 Topway Plus Stainless Steel FM Pre-Assembled Heating Manifold




Description	Ways	Pcs/Pack	Code	Unit Price £
Flow rail at the top				
1"	2	1	01282260	139.00
1"	3	1	01282262	160.60
1"	4	1	01282264	183.00
1"	5	1	01282266	205.90
1"	6	1	01282268	228.40
1"	7	1	01282270	251.50
1"	8	1	01282272	274.40
1"	9	1	01282274	297.20
1"	10	1	01282276	319.60
1"	11	1	01282278	343.30
1"	12	1	01282280	365.70

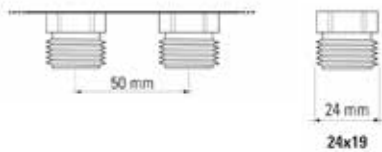

Flow rail has a double regulating red sleeved 0 - 4 l/min flow meter per circuit that allows individual circuit flow regulation and isolation with visual flow indication. Return rail has a blue capped integrated electrothermic body to accommodate an electrothermic actuator per circuit.

Pre-assembled manifold includes 2 x drain off/fill valves, automatic air vents, 6-bar pressure gauge and 2 x blanking plugs. Pre-mounted onto a double offset bracket at 210mm centres.

For pipe, Emmeti Monoblocco connectors and valves please refer to the relevant pages within this section. These must be ordered separately.

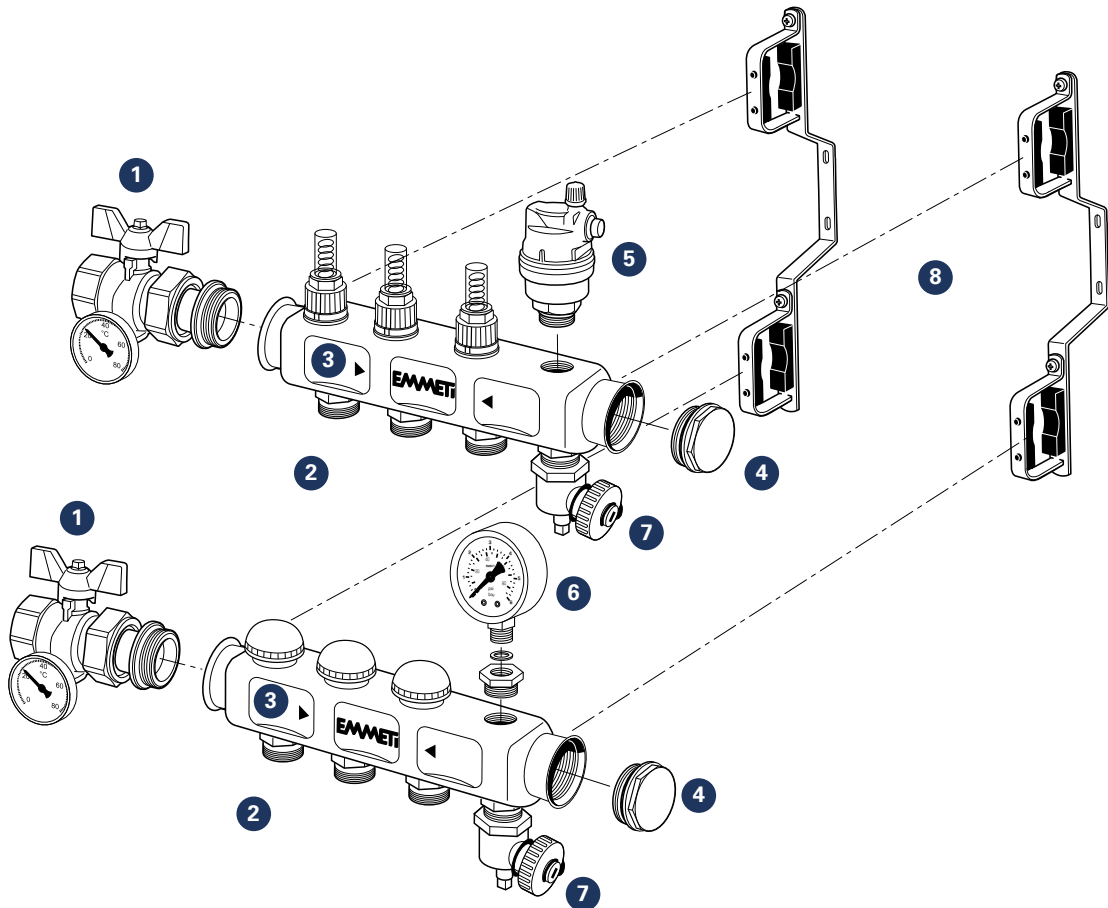

- | | | |
|--|---|--|
| <p>1 Ball Valves
Code: 01306710 1" with thermometer / 01306708 1" without thermometer</p> <p>2 Monoblocco Connectors
A range of Monoblocco connectors are available to suit pipe sizes 10mm – 20mm, and different pipe types PB, PE-X, PE-RT, MLCP and Copper. For the complete range please refer to the relevant pages within this section or visit our website www.emmeti.co.uk</p> | <p>3 Manifold
Code: 01282260 (2 Way) to 01282280 (12 Way) 1"</p> <p>4 Blanking Plug
Code: 90004830 1" M with O-ring seal</p> <p>5 Automatic Air Vent
Code: 00400020 Tecno-Varia auto air vent ½"</p> | <p>6 Pressure Gauge
Code: 90063890</p> <p>7 Drain Fill Valve
Code: 01306824 ½" with ¾" hose connection</p> <p>8 Double Metal Brackets
Code: 01306826 1" 210mm</p> |
|--|---|--|

