

IP 55



IP 50



#### Dati tecnici valvola

Corpo in ottone ST UNI EN 12165 CW617N nichelato  
Sfera in ottone ST UNI EN 12165 CW617N cromata  
Limiti di funzionamento da -40 a 100 °C (fluido circolante)  
Pressione di esercizio PN 40  
Pressione differenziale massima 6 bar  
Tenuta sede sfera PTFE  
Tenuta asta di manovra HNBR

Nota: Nel modello 3 vie è garantito il passaggio del fluido durante le operazioni di manovra.

#### Dati tecnici servomotore

Alimentazione 230 V / 50 Hz  
Assorbimento 4 VA  
Angolo di rotazione 90° (2 vie) - 180° (3 vie)  
Tempo di rotazione 60" (2 vie) - 120" (3 vie)  
Coppia massima 28 Nm (230 V)  
Contatto ausiliario 1-libero 6 A / 230 V (on-off)  
Grado di protezione IP 55 - IP 50  
Classe di isolamento: II  
Indicatore valvola aperta (2 vie) Flusso deviato c-sx c-dx (3 vie)

Dimensioni e diagrammi: vedere sezione allegati tecnici

#### Valve technical data

Valve body made brass ST UNI EN 12165 CW617N with nickel finish  
Ball made brass ST UNI EN 12165 CW617N chromium plated  
Operating temperature range from -40 to 100 °C (circulating fluid)  
Operating pressure PN 40  
Maximum differential pressure 6 bar  
Seals PTFE  
Fittings for operating rod HNBR

Note: in the 3-way type is granted the flow port during the running operations.

#### Servomotor technical data

Power supply 230 V / 50 Hz  
Absorption 4 VA  
Rotation angle 90° (2 ways) - 180° (3 ways)  
Rotation time 60" (2 ways) - 120" (3 ways)  
Maximum torque 28 Nm (230 V)  
Auxiliary contact 1-free 6 A / 230 V (on-off)  
Protection class IP 55 IP 50  
Insulating class: II  
Indicator open valve (2 ways) diverted flux c-sx c-dx (3 ways)

Dimensions and diagrams: see section technical attachments

#### Modulo Plus 230 Vac 2 vie con attacchi a bocchettone filettati Modulo Plus 230 Vac 2 ways with pipe union connection with thread



Misura Size	Vie Ways	Pz. conf. Pcs. pack	Codice Code
1"1/4	2	1	01425700
1"1/2	2	1	01425702
2"	2	1	01425704

**Modulo Plus 230 Vac deviatrice 3 vie con attacchi a bocchettone filettati**  
**Modulo Plus 230 Vac three ways diverter with pipe union connection with thread**




Misura Size	Vie Ways	Pz. conf. Pcs. pack	Codice Code
1"1/4	3	1	01425710
1"1/2	3	1	01425712
2"	3	1	01425714

**Modulo Plus 230 Vac 2 vie filetto Femmina Femmina**  
**Modulo Plus 230 Vac 2 ways, Female Female thread**



Misura Size	Vie Ways	Pz. conf. Pcs. pack	Codice Code
1"1/4	2	1	01425730
1"1/2	2	1	01425732
2"	2	1	01425734

**Modulo Plus 230 Vac deviatrice 3 vie filetto Femmina Femmina**  
**Modulo Plus 230 Vac 3 ways diverter, Female Female thread**

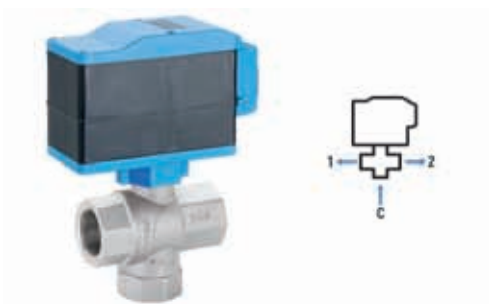

Misura Size	Vie Ways	Pz. conf. Pcs. pack	Codice Code
1"1/4	3	1	01425740
1"1/2	3	1	01425742
2"	3	1	01425744

**Servomotore per valvola motorizzata Modulo Plus**  
**Servomotor for motorised ball valve Modulo Plus**



Misura Size	Pz. conf. Pcs. pack	Codice Code
2 vie - 230 Vac 2 ways - 230 Vac	1	01420170
3 vie - 230 Vac 3 ways - 230 Vac	1	01420172